Publication No. MA3479-14
04MAY04
Part No. 6F8817

MODIFICATION INSTRUCTIONS for the *Kodak* MINILOADER 2000P Service Code: 3479

Modification No. 14
Type 1 Selective

Purpose: To install a GROUND STRAP to prevent artifacts caused by electrostatic discharge at the ENTRY FILM GUIDE.

Important
Qualified service personnel must install this modification.

Service Effects: None

Special Requirements: MOD 14 does not have to be installed if the site has a minimum relative humidity of 40% all year.

Serial Numbers:
- 5001 and higher for the MINILOADER 2000P with the *Kodak Min-R* MAMMOGRAPHY PROCESSOR and Mod 11 installed
- 250,000 - 250,149 for the *Kodak Min-R* MAMMOGRAPHY INTEGRATED PROCESSOR

Installation Time: 1.0 hour

Special Tools: None

Parts Status: Available from Service Parts Management.

Parts Requirements: See Page 2.

Confidential
Restricted Information
© Eastman Kodak Company, 2004

PLEASE NOTE The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from any use of this information, even if loss or damage is caused by Kodak's negligence or other fault.

This equipment includes parts and assemblies sensitive to damage from electrostatic discharge. Use caution to prevent damage during all service procedures.

MODIFICATION KIT 6F8816 includes:

Part No.	Description	Quantity
6F5530	GROUND STRAP	1
MA3479-14	MODIFICATION INSTRUCTIONS	1

Installing the Modification

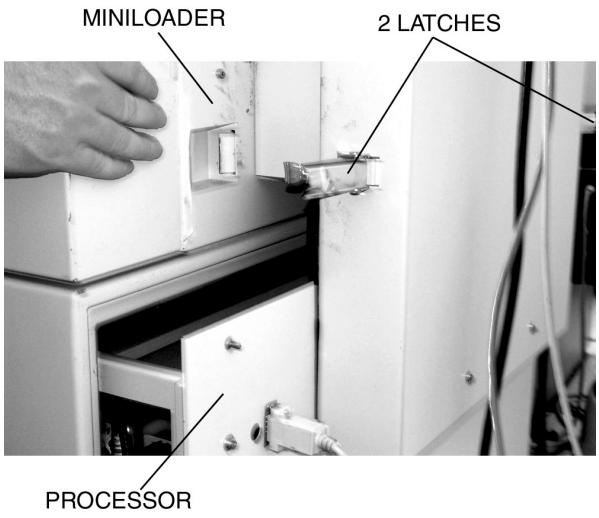

Warning
Dangerous Voltage

[1] De-energize the PROCESSOR.

[2] Open the 2 LATCHES.

[3] Move the MINILOADER for access to the PROCESSOR.

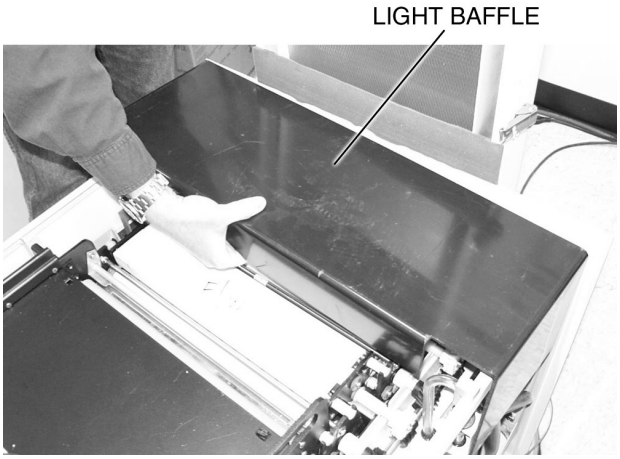

[4] Remove the LIGHT BAFFLE.

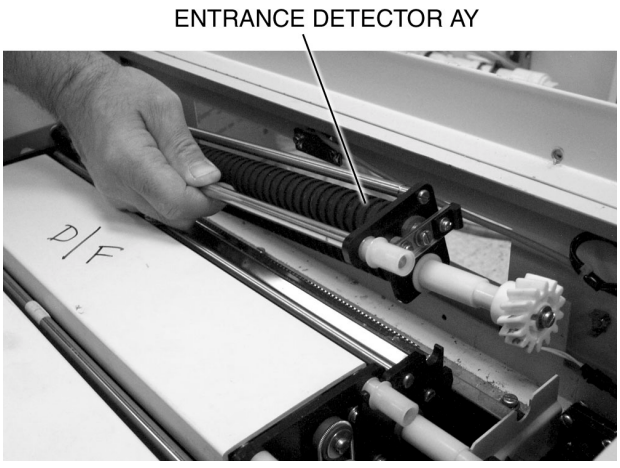

[5] Remove the ENTRANCE DETECTOR AY.

[6] Loosen the SCREW.

[7] Install the GROUND STRAP.

[8] Tighten the SCREW.

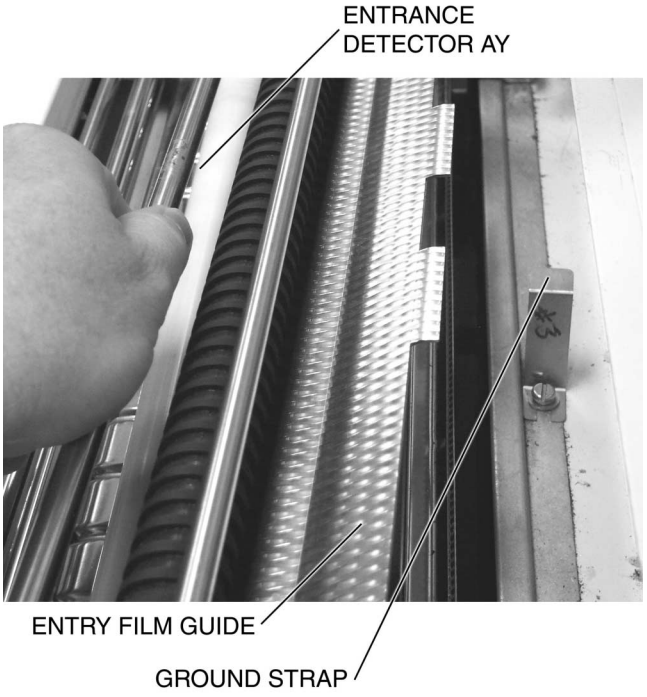

[9] Install the ENTRANCE DETECTOR AY.

[10] Check that the ENTRY FILM GUIDE makes contact with the GROUND STRAP.

[11] Reverse the sequence of Step 2 - Step 4.

Completing the Modification

Warning

Dangerous Voltage

[1] Energize the PROCESSOR.

[2] Operate the MINILOADER using customer film.

[3] Check:

- MINILOADER operates correctly with 18 x 24-cm and 24 x 30-cm size films
- processed film has no scratches or artifacts

[4] Circle “14” on the MODIFICATION LABEL on the MINILOADER.

[5] Record the information for feedback:

K-number	Service Code	Serial No.	Activity Code	Installation Time	Part No.
	3479		M14		6F8816

Publication History

Publication Date	Publication No.	ECO No.	Changed Pages	File Name	Notes
04MAY04	MA3479-14	2665-112	---	ma3479_14.fm	New Publication

Kodak and *Min-R* are trademarks of Eastman Kodak Company.

Printed in U.S.A. • ma3479_14.fm

EASTMAN KODAK COMPANY
Rochester, NY 14650

HEALTH IMAGING